

# 19" server compact cabinets RMA

P/N: RMA-42-L69-BAY-N1-OZA

P/N: RMA-42-A69-BAY-N1-OZA

P/N: RMA-27-A81-BAY-N1-OZA

P/N: RMA-45-A81-BAY-N1-OZA


## Features

- welded construction with IP20 protection
- removable and lockable side panels and rear cover enable an easy access to the installed devices
- front vertical rails are continuously adjustable
- frame of the cabinet and all removable parts are connected with earthing cables
- cable openings covered with breakout-type blanking panels located at the top, bottom and rear part of the cabinet
- breakout-type blanking panels for fan units are located in the top and bottom of the cabinet
- nivelation feet (standard)
- option to order castors, the specific type of castors must be consulted with regard to the weight of the rack
- base with filter RAB-PO-XXX-XD, RAC-PO-XXX-XD
- available upon request stabilizing footing RAX-SS-X04-X1 available upon request (applies in case of cabinets with width of 800 mm)
- sliding vertical rails installation in a span of 19", 21" or 23" (only in case of cabinets with width of 800 mm)
- protective blanking panel with a brush to seal the cabinet opening against dust penetration (1 pc)
- set of M6 screws and captive nuts (16 pcs)



Color black RAL9005

Surface structured, matt

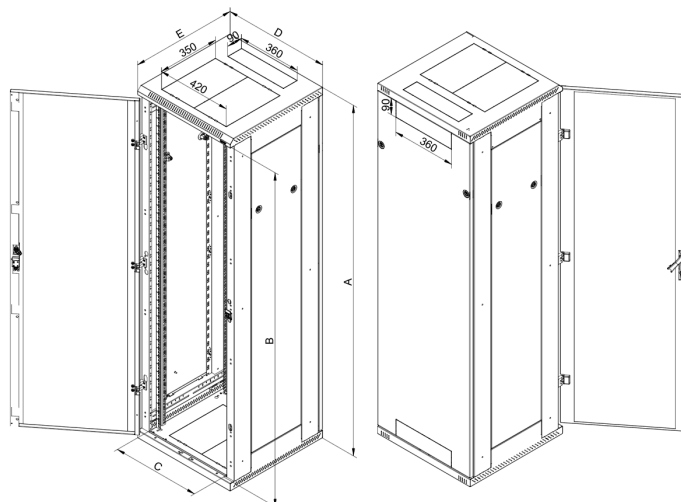

## Features

- perforated single door with air permeability of 80%



## Parameters L69

Width 600 mm, depth 900 mm	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	weight (kg)	capacity (kg)
42U P/N: RMA-42-L69-BAY-N1-OZA	1970	1868	487	600	900	90,3	800

## Features

- single door, hardened smoked glass



## Parameters A69

Width 600 mm, depth 900 mm	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	weight (kg)	capacity (kg)
42U P/N: RMA-42-A69-BAY-N1-OZA	1970	1868	487	600	900	95,3	800

## Features

- single door, hardened smoked glass



## Parameters A81

Width 800 mm, depth 1000 mm	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	weight (kg)	capacity (kg)
27U P/N: RMA-27-A81-BAY-N1-OZA	1300	1198	487	800	1000	86,6	800
45U P/N: RMA-45-A81-BAY-N1-OZA	2105	1868	487	800	1000	121,8	800