

19” free-standing demountable cabinets RZA

P/N: RZA-xx-A66-CAY-N1	P/N: RZA-xx-A68-CAY-N1	P/N: RZA-xx-A69-CAY-N1
P/N: RZA-xx-A61-CAY-N1	P/N: RZA-xx-A60-CAY-N1	P/N: RZA-xx-A62-CAY-N1
P/N: RZA-xx-A86-CAY-N1	P/N: RZA-xx-A88-CAY-N1	P/N: RZA-xx-A89-CAY-N1
P/N: RZA-xx-A81-CAY-N1	P/N: RZA-xx-A80-CAY-N1	P/N: RZA-xx-A82-CAY-N1




Features

- screwed construction with IP20 protection
- partial or complete dismantling enables installation to difficult to reach places
- hardened smoked glass door (standard)
- solid steel or perforated door (air permeability 80 %) available as single or double-wing request
- removable and lockable side panels and rear cover enable an easy access to the installed devices
- possibility of replacing rear cover with door (the same variants as the front door)
- front vertical rails are continuously adjustable
- frame of the cabinet and all removable parts are connected with earthing cables
- cable openings covered with breakout-type blanking panels located at the top, bottom and rear part of the cabinet
- breakout-type blanking panels for fan units are located in the top and bottom of the cabinet
- nivelation feet (standard)
- option to order castors, the specific type of castors must be consulted with regard to the weight of the rack
- base with filter RAB-PO-XXX-XD, RAC-PO-XXX-XD available upon request
- sliding vertical rails installation in a span of 19”, 21” or 23”
- protective blanking panel with a brush to seal the cabinet opening against dust penetration (1pc)
- set of M6 screws and captive nuts (16 pcs)

Product codes

Front door RZA-xx-xxx-xAY-Nx	A – hardened smoked glass door (standard) C – solid steel door L – perforated door E – double wing, hardened smoked glass door F – double wing, solid steel door G – double wing, perforated door
Color RZA-xx-xxx-xAY-Nx	C – grey RAL7035 (standard) B – black RAL9005
Capacity RMA-xx-xxx-xAY-Nx	1 - 800 kg (standard)
Surface	structured, matt

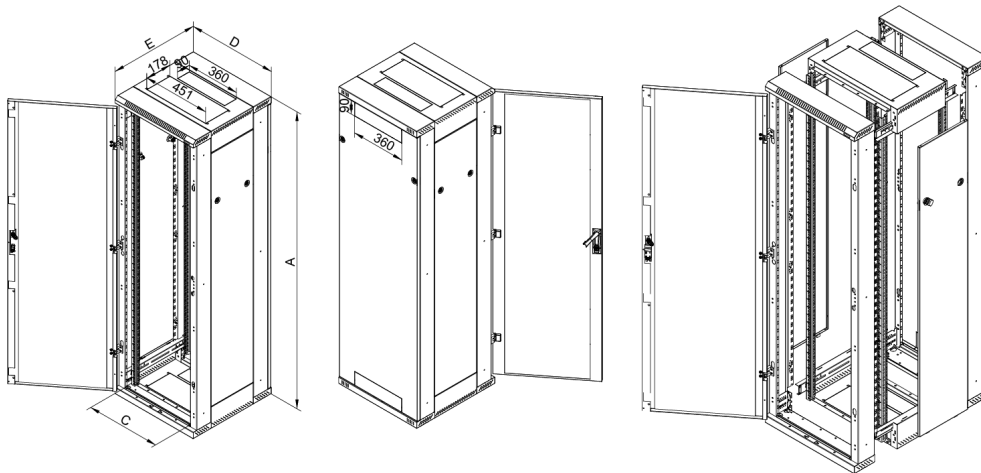

Parameters A66

Width 600 mm, depth 600 mm		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	weight (kg)	capacity (kg)
15U	P/N: RZA-15-A66-CAY-N1	770	668	487	600	600	41,9	800
18U	P/N: RZA-18-A66-CAY-N1	900	798	487	600	600	46,0	800
22U	P/N: RZA-22-A66-CAY-N1	1080	978	487	600	600	51,5	800
27U	P/N: RZA-27-A66-CAY-N1	1300	1198	487	600	600	58,5	800
32U	P/N: RZA-32-A66-CAY-N1	1525	1423	487	600	600	65,6	800
37U	P/N: RZA-37-A66-CAY-N1	1750	1648	487	600	600	72,9	800
42U	P/N: RZA-42-A66-CAY-N1	1970	1868	487	600	600	79,8	800
45U	P/N: RZA-45-A66-CAY-N1	2105	2003	487	600	600	84,1	800
47U	P/N: RZA-47-A66-CAY-N1	2194	2092	487	600	600	86,8	800

Parameters A68

Width 600 mm, depth 800 mm		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	weight (kg)	capacity (kg)
15U	P/N: RZA-15-A68-CAY-N1	770	668	487	600	800	46,9	800
18U	P/N: RZA-18-A68-CAY-N1	900	798	487	600	800	51,5	800
22U	P/N: RZA-22-A68-CAY-N1	1080	978	487	600	800	57,6	800
27U	P/N: RZA-27-A68-CAY-N1	1300	1198	487	600	800	65,3	800
32U	P/N: RZA-32-A68-CAY-N1	1525	1423	487	600	800	73,2	800
37U	P/N: RZA-37-A68-CAY-N1	1750	1648	487	600	800	81,1	800
42U	P/N: RZA-42-A68-CAY-N1	1970	1868	487	600	800	88,9	800
45U	P/N: RZA-45-A68-CAY-N1	2105	2003	487	600	800	93,5	800
47U	P/N: RZA-47-A68-CAY-N1	2194	2092	487	600	800	96,5	800

Parameters A69

Width 600 mm, depth 900 mm		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	weight (kg)	capacity (kg)
15U	P/N: RZA-15-A69-CAY-N1	770	668	487	600	900	51,1	800
18U	P/N: RZA-18-A69-CAY-N1	900	798	487	600	900	56,2	800
22U	P/N: RZA-22-A69-CAY-N1	1080	978	487	600	900	62,9	800
27U	P/N: RZA-27-A69-CAY-N1	1300	1198	487	600	900	71,4	800
32U	P/N: RZA-32-A69-CAY-N1	1525	1423	487	600	900	80,1	800
37U	P/N: RZA-37-A69-CAY-N1	1750	1648	487	600	900	88,9	800
42U	P/N: RZA-42-A69-CAY-N1	1970	1868	487	600	900	97,3	800
45U	P/N: RZA-45-A69-CAY-N1	2105	2003	487	600	900	102,6	800
47U	P/N: RZA-47-A69-CAY-N1	2194	2092	487	600	900	105,9	800

Parameters A61

Width 600 mm, depth 1000 mm		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	weight (kg)	capacity (kg)
15U	P/N: RZA-15-A61-CAY-N1	770	668	487	600	1000	53,7	800
18U	P/N: RZA-18-A61-CAY-N1	900	798	487	600	1000	59,0	800
22U	P/N: RZA-22-A61-CAY-N1	1080	978	487	600	1000	66,0	800
27U	P/N: RZA-27-A61-CAY-N1	1300	1198	487	600	1000	74,9	800
32U	P/N: RZA-32-A61-CAY-N1	1525	1423	487	600	1000	74,0	800
37U	P/N: RZA-37-A61-CAY-N1	1750	1648	487	600	1000	93,1	800
42U	P/N: RZA-42-A61-CAY-N1	1970	1868	487	600	1000	102,0	800
45U	P/N: RZA-45-A61-CAY-N1	2105	2003	487	600	1000	107,3	800
47U	P/N: RZA-47-A61-CAY-N1	2194	2092	487	600	1000	110,9	800

Parameters A60

Width 600 mm, depth 1100 mm		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	weight (kg)	capacity (kg)
15U	P/N: RZA-15-A60-CAY-N1	770	668	487	600	1100	56,6	800
18U	P/N: RZA-18-A60-CAY-N1	900	798	487	600	1100	61,7	800
22U	P/N: RZA-22-A60-CAY-N1	1080	978	487	600	1100	69,1	800
27U	P/N: RZA-27-A60-CAY-N1	1300	1198	487	600	1100	78,3	800
32U	P/N: RZA-32-A60-CAY-N1	1525	1423	487	600	1100	87,8	800
37U	P/N: RZA-37-A60-CAY-N1	1750	1648	487	600	1100	97,3	800
42U	P/N: RZA-42-A60-CAY-N1	1970	1868	487	600	1100	106,5	800
45U	P/N: RZA-45-A60-CAY-N1	2105	2003	487	600	1100	112,1	800
47U	P/N: RZA-47-A60-CAY-N1	2194	2092	487	600	1100	115,7	800

Parameters A62

Width 600 mm, depth 1200 mm		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	weight (kg)	capacity (kg)
15U	P/N: RZA-15-A62-CAY-N1	770	668	487	600	1200	58,8	800
18U	P/N: RZA-18-A62-CAY-N1	900	798	487	600	1200	64,5	800
22U	P/N: RZA-22-A62-CAY-N1	1080	978	487	600	1200	72,1	800
27U	P/N: RZA-27-A62-CAY-N1	1300	1198	487	600	1200	81,7	800
32U	P/N: RZA-32-A62-CAY-N1	1525	1423	487	600	1200	91,6	800
37U	P/N: RZA-37-A62-CAY-N1	1750	1648	487	600	1200	101,5	800
42U	P/N: RZA-42-A62-CAY-N1	1970	1868	487	600	1200	111,1	800
45U	P/N: RZA-45-A62-CAY-N1	2105	2003	487	600	1200	116,9	800
47U	P/N: RZA-47-A62-CAY-N1	2194	2092	487	600	1200	120,7	800

Parameters A86

Width 800 mm, depth 600 mm		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	weight (kg)	capacity (kg)
15U	P/N: RZA-15-A86-CAY-N1	770	668	687	800	600	53,5	800
18U	P/N: RZA-18-A86-CAY-N1	900	798	687	800	600	58,1	800
22U	P/N: RZA-22-A86-CAY-N1	1080	978	687	800	600	64,1	800
27U	P/N: RZA-27-A86-CAY-N1	1300	1198	687	800	600	71,8	800
32U	P/N: RZA-32-A86-CAY-N1	1525	1423	687	800	600	79,7	800
37U	P/N: RZA-37-A86-CAY-N1	1750	1648	687	800	600	87,7	800
42U	P/N: RZA-42-A86-CAY-N1	1970	1868	687	800	600	95,4	800
45U	P/N: RZA-45-A86-CAY-N1	2105	2003	687	800	600	100,0	800
47U	P/N: RZA-47-A86-CAY-N1	2194	2092	687	800	600	103,1	800

Parameters A88

Width 800 mm, depth 800 mm		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	weight (kg)	capacity (kg)
15U	P/N: RZA-15-A88-CAY-N1	770	668	687	800	800	61,5	800
18U	P/N: RZA-18-A88-CAY-N1	900	798	687	800	800	66,6	800
22U	P/N: RZA-22-A88-CAY-N1	1080	978	687	800	800	73,3	800
27U	P/N: RZA-27-A88-CAY-N1	1300	1198	687	800	800	81,6	800
32U	P/N: RZA-32-A88-CAY-N1	1525	1423	687	800	800	90,3	800
37U	P/N: RZA-37-A88-CAY-N1	1750	1648	687	800	800	99,0	800
42U	P/N: RZA-42-A88-CAY-N1	1970	1868	687	800	800	107,4	800
45U	P/N: RZA-45-A88-CAY-N1	2105	2003	687	800	800	112,5	800
47U	P/N: RZA-47-A88-CAY-N1	2194	2092	687	800	800	115,3	800

Parameters A89

Width 800 mm, depth 900 mm		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	weight (kg)	capacity (kg)
15U	P/N: RZA-15-A89-CAY-N1	770	668	687	800	900	67,0	800
18U	P/N: RZA-18-A89-CAY-N1	900	798	687	800	900	72,5	800
22U	P/N: RZA-22-A89-CAY-N1	1080	978	687	800	900	79,8	800
27U	P/N: RZA-27-A89-CAY-N1	1300	1198	687	800	900	89,0	800
32U	P/N: RZA-32-A89-CAY-N1	1525	1423	687	800	900	98,5	800
37U	P/N: RZA-37-A89-CAY-N1	1750	1648	687	800	900	108,0	800
42U	P/N: RZA-42-A89-CAY-N1	1970	1868	687	800	900	117,1	800
45U	P/N: RZA-45-A89-CAY-N1	2105	2003	687	800	900	122,8	800
47U	P/N: RZA-47-A89-CAY-N1	2194	2092	687	800	900	126,5	800

Parameters A81

Width 800 mm, depth 1000 mm		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	weight (kg)	capacity (kg)
15U	P/N: RZA-15-A81-CAY-N1	770	668	687	800	1000	71,0	800
18U	P/N: RZA-18-A81-CAY-N1	900	798	687	800	1000	76,7	800
22U	P/N: RZA-22-A81-CAY-N1	1080	978	687	800	1000	84,3	800
27U	P/N: RZA-27-A81-CAY-N1	1300	1198	687	800	1000	93,9	800
32U	P/N: RZA-32-A81-CAY-N1	1525	1423	687	600	1000	103,7	800
37U	P/N: RZA-37-A81-CAY-N1	1750	1648	687	800	1000	113,6	800
42U	P/N: RZA-42-A81-CAY-N1	1970	1868	687	800	1000	123,2	800
45U	P/N: RZA-45-A81-CAY-N1	2105	2003	687	800	1000	129,0	800
47U	P/N: RZA-47-A81-CAY-N1	2194	2092	687	800	1000	132,8	800

Parameters A80

Width 800 mm, depth 1100 mm		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	weight (kg)	capacity (kg)
15U	P/N: RZA-15-A80-CAY-N1	770	668	687	800	1100	75,3	800
18U	P/N: RZA-18-A80-CAY-N1	900	798	687	800	1100	80,9	800
22U	P/N: RZA-22-A80-CAY-N1	1080	978	687	800	1100	88,8	800
27U	P/N: RZA-27-A80-CAY-N1	1300	1198	687	800	1100	98,7	800
32U	P/N: RZA-32-A80-CAY-N1	1525	1423	687	800	1100	108,9	800
37U	P/N: RZA-37-A80-CAY-N1	1750	1648	687	800	1100	119,2	800
42U	P/N: RZA-42-A80-CAY-N1	1970	1868	687	800	1100	129,2	800
45U	P/N: RZA-45-A80-CAY-N1	2105	2003	687	800	1100	135,2	800
47U	P/N: RZA-47-A80-CAY-N1	2194	2092	687	800	1100	139,1	800

Parameters A82

Width 800 mm, depth 1200 mm		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	weight (kg)	capacity (kg)
15U	P/N: RZA-15-A82-CAY-N1	770	668	687	800	1200	78,9	800
18U	P/N: RZA-18-A82-CAY-N1	900	798	687	800	1200	85,1	800
22U	P/N: RZA-22-A82-CAY-N1	1080	978	687	800	1200	93,3	800
27U	P/N: RZA-27-A82-CAY-N1	1300	1198	687	800	1200	103,6	800
32U	P/N: RZA-32-A82-CAY-N1	1525	1423	687	800	1200	114,2	800
37U	P/N: RZA-37-A82-CAY-N1	1750	1648	687	800	1200	124,8	800
42U	P/N: RZA-42-A82-CAY-N1	1970	1868	687	800	1200	135,2	800
45U	P/N: RZA-45-A82-CAY-N1	2105	2003	687	800	1200	141,4	800
47U	P/N: RZA-47-A82-CAY-N1	2194	2092	687	800	1200	145,5	800